

Product Name	Counter-Top Single Burner Cooktop	Quantity		Item #	
--------------	-----------------------------------	----------	--	--------	--



Note: Induction cooking requires the use of induction compatible (i.e. magnetic) pots and pans.



Standard Features

- Portable tabletop design with stainless steel housing, heavy duty, electronic components, and high impact, thick, glass-ceramic top engineered for use in commercial kitchens
- Control knob for ease of use and automatic power or temperature control
- Temperature control allows for 27 precise temperature settings and 20 power cook settings
- Pan Maximizer feature achieves maximum heating of any induction compatible pan
- Microprocessor monitors vital components 120 times per second to check for overheating, power supply problems, and more. Cooktop shuts off and displays error codes enabling user to diagnose and correct minor problems
- LED display for precise user feedback
- Automatic pan detection allows for instant energy transmission to pan and almost no energy consumption when pan is not present
- Automatic shut-off feature prohibits overheating
- Integral grease filter and air baffle to ensure cleaner and cooler air intake
- Sloped front panel allows for easy viewing and operation
- Easy to clean glass-ceramic top surface
- Integral cooling fan keeps internal electronics cool
- Available in 1500 and 1800 watts (100-120VAC), 2500 and 3500 watts (208-240VAC)

- Three year limited warranty
- Made in the USA*

Specifications

Shall be a CookTek counter-top induction cooktop, model _____ with a total kW rating of _____.

Unit shall be manufactured in the United States and constructed of a stainless steel housing and a high impact glass-ceramic top.


Unit shall be equipped with a built-in microprocessor that performs precise temperature control, auto shut-off to prevent overheating, self-diagnostics and a pan maximizer feature that ensures maximum heating of any induction compatible pan.

Unit shall have adjustable electronic control with 20 power cook settings and 27 precise temperature settings.

Unit shall operate on _____ power with integral _____ cord and plug (supplied).

*of USA and imported parts

COUNTER-TOP SINGLE BURNER COOKTOP MC1500, MC1800, MC2500, MC3500

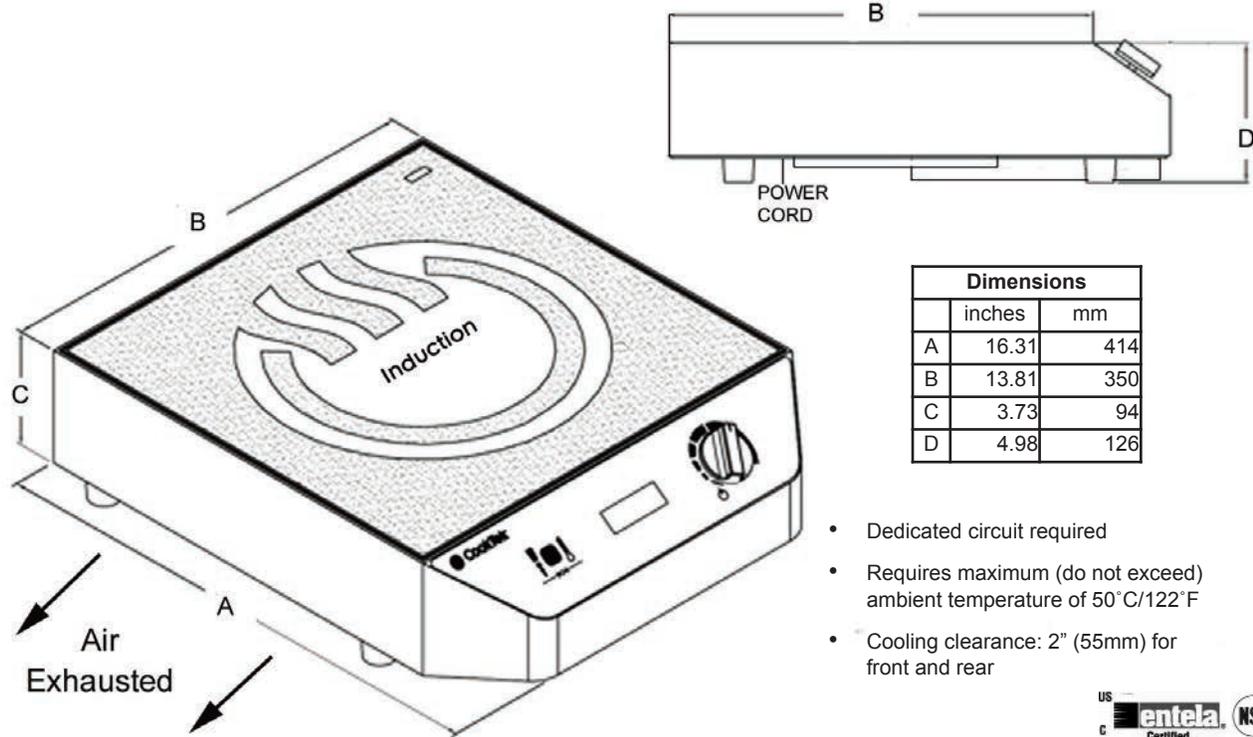

Dimensions		
	inches	mm
A	16.31	414
B	13.81	350
C	3.73	94
D	4.98	126

- Dedicated circuit required
- Requires maximum (do not exceed) ambient temperature of 50°C/122°F
- Cooling clearance: 2" (55mm) for front and rear



Specifications


Model Number	MC1500	MC1800	MC2500	MC3500
Power Requirements	120VAC, 1 Ph	100-120VAC, 1 Ph	208-240VAC, 1 Ph	208-240VAC, 1 Ph
Power Consumption	1500W (max rating)	1800W (max rating)	2500W (max rating)	3500W (max rating)
BTU Comparison	13,000 BTU	16,000 BTU	22,000 BTU	31,000 BTU
Voltage	120VAC, 50/60 Hz	100-120VAC, 50/60 Hz	208-240VAC, 50/60 Hz	208-240VAC, 50/60 Hz
Amperage	12.5A (max)	15A (max)	11A (max)	17A (max)
Power Range	100-1500W	100-1800W	100-2500W	100-3500W
Temperature Range	85-500°F / 30-260°C	85-500°F / 30-260°C	85-500°F / 30-260°C	85-500°F / 30-260°C
Dimensions (in)	16.31" x 13.81" x 4.98"	16.31" x 13.81" x 4.98"	16.31" x 13.81" x 4.98"	16.31" x 13.81" x 4.98"
Dimensions (mm)	414 x 350 x 126	414 x 350 x 126	414 x 350 x 126	414 x 350 x 126
Weight	19 lbs / 8.6 kg	19 lbs / 8.6 kg	19 lbs / 8.6 kg	19 lbs / 8.6 kg
Packaged Weight	24 lbs / 10.4 kg	24 lbs / 10.4 kg	24 lbs / 10.4 kg	24 lbs / 10.4 kg
Packaged Dimensions (in)	20.75" x 18.75" x 9"	20.75" x 18.75" x 9"	20.75" x 18.75" x 9"	20.75" x 18.75" x 9"
Packaged Dims. (mm)	527 x 476 x 229	527 x 476 x 229	527 x 476 x 229	527 x 476 x 229
Power Cord Length	6 ft / 1.8 m	6 ft / 1.8 m	6 ft / 1.8 m	6 ft / 1.8 m
Plug Type	NEMA 5-15P	NEMA 5-15P	NEMA 6-20P	NEMA 6-20P
Warranty	36 months limited parts and labor			

Note: Ambient air should not exceed 50°C/122°F. Dedicated circuit required. Many local codes exist, and it is the Owner and Installer's responsibility to comply with those codes. CookTek continually improves its products and reserves the right to change or improve specifications without notice.

CookTek Induction Systems, LLC
 156 N. Jefferson St. Ste 300
 Chicago, IL 60661-1436, USA
 www.cooktek.com

Tel: 1.312.563.9600 Fax: 1.312.432.6220
 Toll Free: 1.888.COOKTEK (266.5835)
 Toll Free Fax: 1.888.COOKFAX (266.5329)

Product Name	650 Watt Under Counter-Top Incogneeto™ Induction Buffet	Quantity		Item #	
--------------	---	----------	--	--------	--

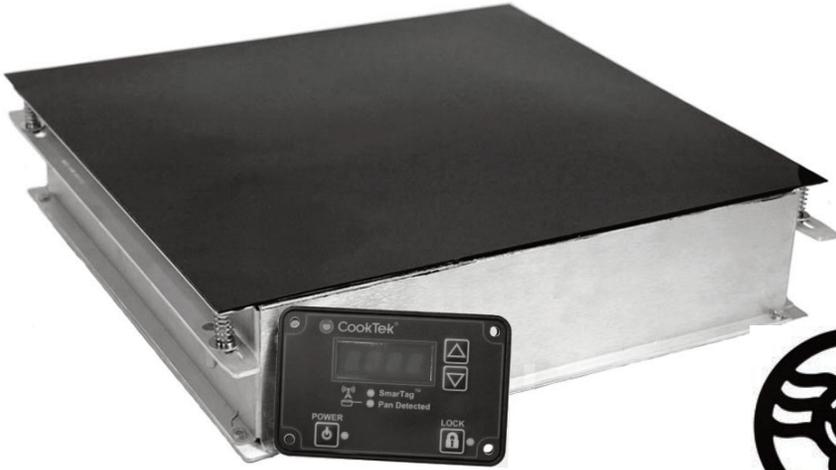

Magneeto™ 2 pictured one included with purchase of each unit

Note: Induction buffet units require the use of induction compatible (i.e. magnetic) servingware.



Standard Features

- Under counter-top design, aluminum housing, heavy duty energy efficient electronics, and polycarbonate top
- Mounts to underside of counter-top on fixed position track system - 19.76" (502mm) supplied.
- Units require CookTek Magneeto™ 2 trivet (patent pending) - included with each unit - and standard induction compatible serving dishes. Magneeto™ 2 acts as a temperature sensor, communicator, and locator device which allows heating of induction compatible dishes through stone counter-top
- Units compatible with 20 or 30mm thick standard granite countertops
- Temperature selected via control panel, or Magneeto™ 2 can be programmed via keypad to preset a temperature for automatic control
- Automatic pan detection allows for instant energy transmission to pan, and almost no energy consumption when pan is not present
- Maximum temperature limit prevents damage to servingware, keeps food in the "safe zone," and keeps operations within ventilation code
- Standard Cat 5e or Cat 6 patch cable from unit to control box is included. Replacement cables up to 25ft (7.6m) long may be used but **MUST BE SHIELDED**.
- Lock feature prevents unwanted setting changes
- Red LED display for precise user feedback and control

- Available in 650 watts (100-120VAC - three units per 15 amp circuit, four per 20 amp circuit) and 650 watts (200-240VAC - five units per 15 amp circuit)
- Three year limited warranty in US and Canada only - see warranty statement for full details.
- Made in the USA*

Specifications

Shall be a CookTek under counter-top induction buffet unit, model _____ with a total kW rating of 0.65 kW.

Unit shall be manufactured in the United States and constructed of an aluminum housing and polycarbonate top.



Unit shall be built with an auto shut-off feature to prevent overheating, offer self-diagnostics, and have a pan-maximizer feature to ensure maximum heating of any induction compatible pan.

Unit shall operate on _____ power with integral _____ cord and plug (supplied).


NOTE: When mounting, the **TOTAL DISTANCE** from the top of the unit to the top of the countertop must be 1.57" (40mm)

*of USA and imported parts


650 WATT UNDER COUNTER-TOP INCOGNEETO™ INDUCTION BUFFET B651-U, B652-U

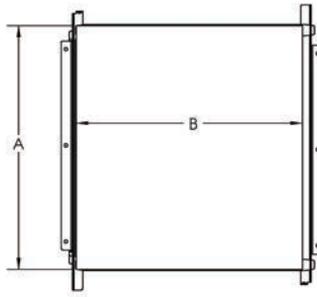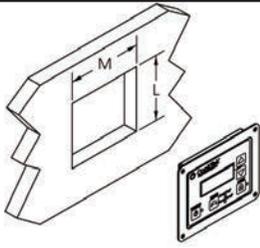


Dimensions		
	inches	mm
A	16.23	412
B	14.91	378
C	19.76	502
D	17.50	444
E	4.17	105
F	3.81	97
G	2.46	62
H	3.26	83
J	1.91	46
K	1.02	26
L	2.25	57
M	2.90	74

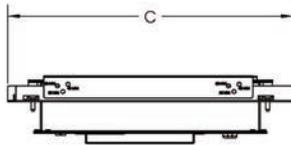

Front View

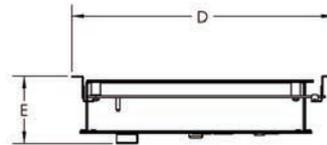

Side View

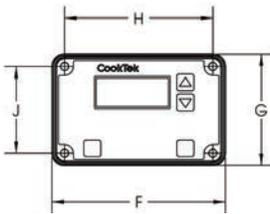

- Internal cooling fan displaces 70 CFM (2.0m³/min). Adequate cabinet venting should be provided - typically 16in² (100cm²) per unit. The maximum (do not exceed) ambient temperature is 50°C/122°F.
- Cooling clearance: 2" (55mm) for front and rear, 6" (152mm) below
- When mounting, the TOTAL DISTANCE from the top of the unit to the top of the countertop must be 1.57" (40mm)

Specifications

Model Number	B651-U	B652-U
Power Requirements	100-120VAC, 1Ph	200-240VAC, 1 Ph
Power Consumption	650W (max)	650W (max)
Voltage	100-120VAC, 50/60 Hz	200-240VAC, 50/60 Hz
Amperage	5A (max)	2.7A (max)
Power Range	100-650W	100-650W
Preset Temperatures	150, 160, 175, 190°F / 65, 70, 80, 85°C	150, 160, 175, 190°F / 65, 70, 80, 85°C
Additional Temperature Settings Range	80-190°F / 30-85°C	80-190°F / 30-85°C
Dimensions (in)	19.76" x 17.50" x 4.17"	19.76" x 17.50" x 4.17"
Dimensions (mm)	502 x 444 x 105	502 x 444 x 105
Weight	15 lbs / 6.8 kg	15 lbs / 6.8 kg
Packaged Weight	20 lbs / 9 kg	20 lbs / 9 kg
Packaged Dimensions (in)	20" x 20" x 10"	20" x 20" x 10"
Packaged Dimensions (mm)	508 x 508 x 254	508 x 508 x 254
Power Cord Length	6 ft / 1.8 m	6 ft / 1.8 m
Plug Type	NEMA 5-15P	NEMA 6-20Pin US/Canada - country specific elsewhere
Remote Control Box Cord Length	6 ft / 1.8 m	6 ft / 1.8 m
Warranty	36 months limited parts and labor in US/Canada only - see statement for details	

Note: Ambient air should not exceed 50°C/122°F. Many local codes exist, and it is the Owner and Installer's responsibility to comply with those codes. CookTek continually improves its products and reserves the right to change or improve specifications without notice.

CookTek Induction Systems, LLC
156 N. Jefferson St. Ste 300
Chicago, IL 60661-1436, USA
www.cooktek.com

Tel: 1.312.563.9600 Fax: 1.312.432.6220
Toll Free: 1.888.COOKTEK (266.5835)
Toll Free Fax: 1.888.COOKFAX (266.5329)